



KEG CHANGER

**Automation
matters.**

Drive increased sales by 4x, while we take care of the keg switching





Non-stop service!

No downtime at the end of a keg

Facilitate the bar **operations**, with the Keg Changer. It will switch amongst 4 kegs instantaneously and **automatically** once a keg is detected empty.

The power of the Keg Changer environment

- ⊕ Fully automated and intuitive: plug'n'serve
- ⊕ Time saver! Automated keg switch in less than a second
- ⊕ Easy integration in any traditional beer installation
- ⊕ Minimal manipulation required by the bar staff
- ⊕ A constant high-quality of beer, thanks to the auto-purge feature

Enable your IoT world with Drinkotec



With 40 years of expertise in beverage dispensers, Drinkotec knows the industry's needs inside out. Over the years we created an **360° ecosystem** where Data matters.

All our devices are connected to a unique secured analytics platform: **Loop³⁶⁰ Analytics**.

Beverage brands and their customers will empower the teams with this **powerful & user-friendly** beverage operations platform to manage sales, marketing, technical, inventory operations and drive customer success.

Bakusyu Club Pop eye

Carlsberg
2 187 260 CHF

Technical features

- ⊕ Installation inside or outside the cold room, or in your Cellar. Max. 3 meters away from the kegs
- ⊕ A 7" touch screen where you can visualize percentage of volumes lefts in each plugged keg
- ⊕ Beer pump: supply multiple taps from one keg changer
- ⊕ Blocking valve: to close all the lines directly from your device
- ⊕ Exists in two versions: up to 2 kegs, up to 4 kegs

Main platform features

Real-time sales performance


Optimized SPR (Sold-to-Poured Ratio)

Remote Beverage quality monitoring

Inventory anticipation

New engagement marketing channel



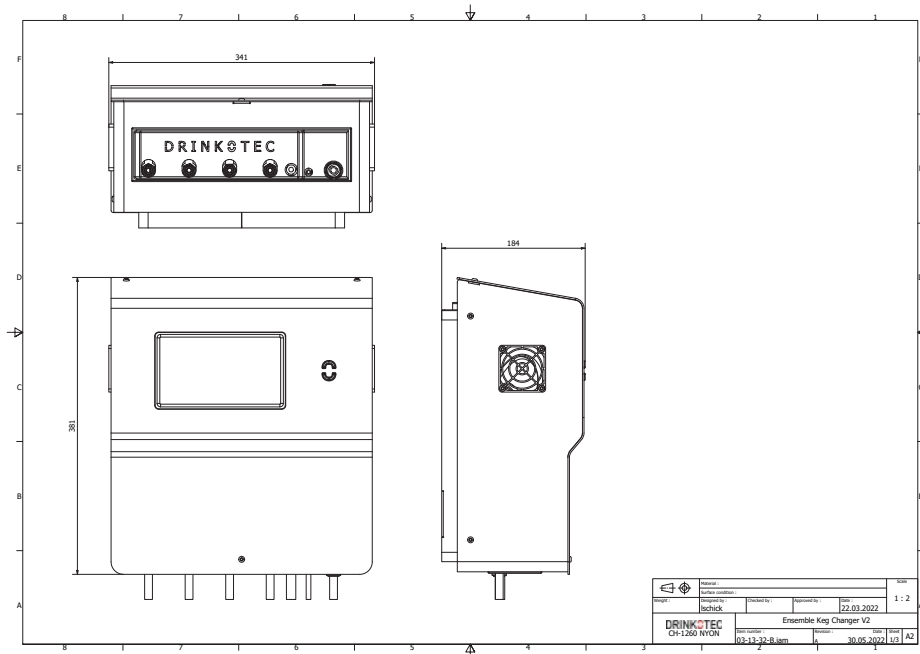

Standard Requirements

The KEG CHANGER must be placed at max. 3m away from the kegs

Connectivity

4G equipped

General

Maximum number of managed taps

4

User interface

Touch Screen

Specification

Performance

Optimised ambient temperature

3°C - 20°C

Max operating temperature

25°C

Physical Data

Height

381 mm

Width

335 mm

Depth

183 mm

Weight

8 kg

Electrical

Mains voltage/frequency

Male plug type F / type J _100-240 V

Power

90 W

AC current (Typ.)

0.95A@115VAC 0.5A@230VAC 0.4A@277VAC

Beer Pressure

Max\Min Beer pressure

4 bar/0,8 bar

Option

Beer pump

Beer pump for feeding several taps (max 3)

Max/Min CO2 pressure When using the pump option

4 bar/0,5 more than the pressure on the keg

Additional barrels

2

Operating Temperature

With pump

2°-25°

Without pump

2°-15°

For further information:
price list, distributor contracts,
logistic etc., please send a request
to our sales team at **sales@drinkotec.ch**

